

# KUKA




Robotics\_Range






- 1) Valid for standard version
- 2) Refers to intersection of axes 4 and 5
- 3) Different axis data for ceiling variants
- 4) Robot model available as ceiling-mounted variant
- 5) Robot model not available as ceiling-mounted or Foundry variant

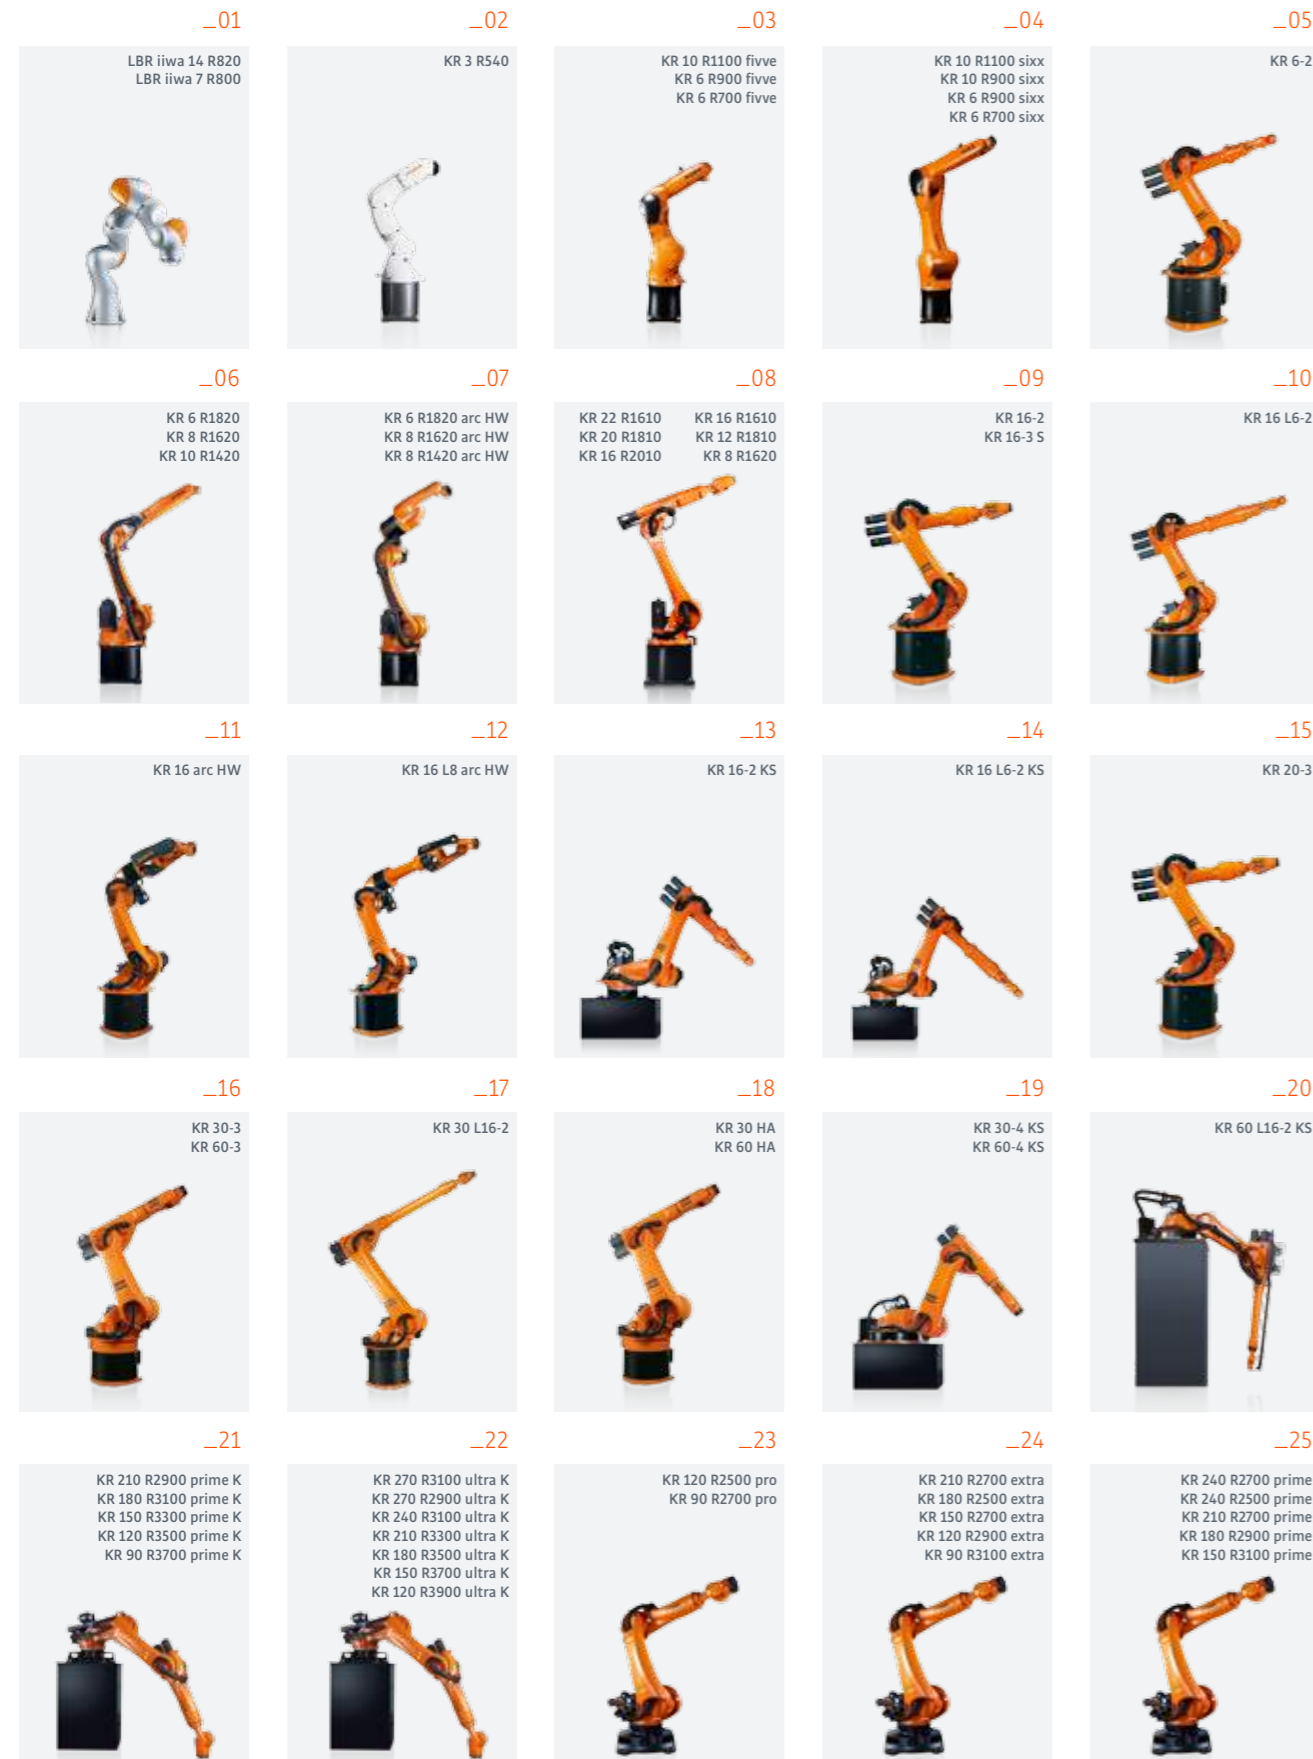

Number	
Types	
Rated payload <sup>1)</sup>	
Rated suppl. load arm Max. reach <sup>2)</sup> / Z-stroke	
Number of axes	
Positioning repeatability	
Weight (robot) approx.	
Mounting position	
Version (optional)	
Comments	
Axis data	
A1	Range
A2	
A3	
A4	
A5	
A6	
A7	
A1	Velocity
A2	
A3	
A4	
A5	
A6	
A7	

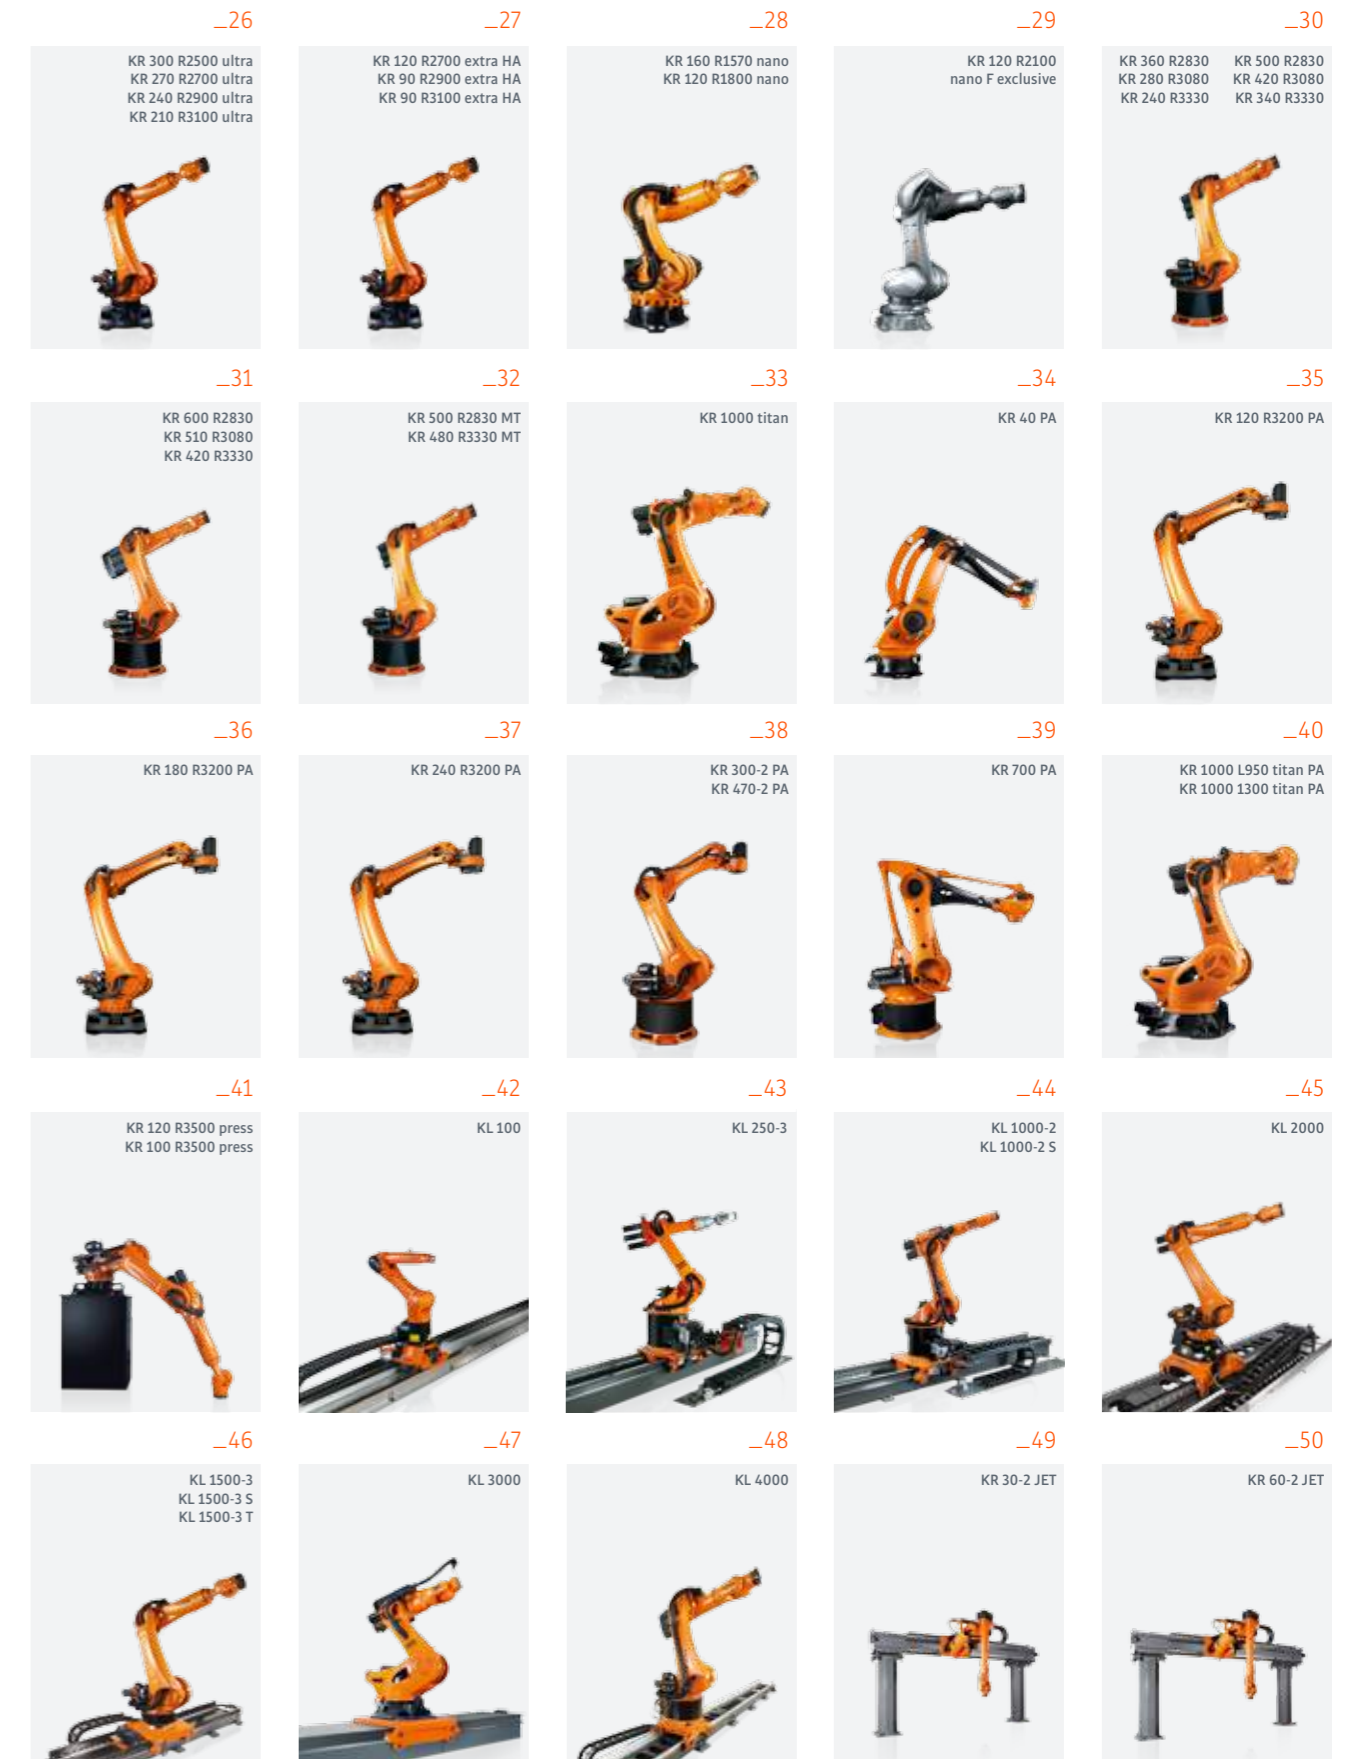



[www.contact.kuka-robotics.com](http://www.contact.kuka-robotics.com)



[www.facebook.com/KUKA.Robotics](https://www.facebook.com/KUKA.Robotics)



[www.youtube.com/kukarobotgroup](https://www.youtube.com/kukarobotgroup)



Twitter: @kuka\_roboticsEN

Edition **February 2017**

Details provided about the properties and usability of the products are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered is determined by the subject matter of the specific contract. No liability accepted for errors or omissions. Subject to technical alterations.

© 2017 KUKA Roboter GmbH

[www.kuka.com](http://www.kuka.com)